

S.P.C.

HEAD END EQUIPMENT (1020 & 3020)

SPC.1020 & 3020 HEAD END EQUIPMENT



KEY FEATURES

Shows graphically the building and lighting layout | Connects to SPX lighting area controllers via T-Bus or IP network | Available as free-standing or 19" 20 rack mount unit | Operation is via monitor, keyboard, mouse supplied by Simmtronic | Allows user to interrogate and re-configure the SPECS3 lighting control system


TECHNICAL SPECIFICATION

SUPPLY | 230VAC, 50Hz

MAX LOAD | 80w

WEIGHT | 9Kg

INGRESS PROTECTION | IP20

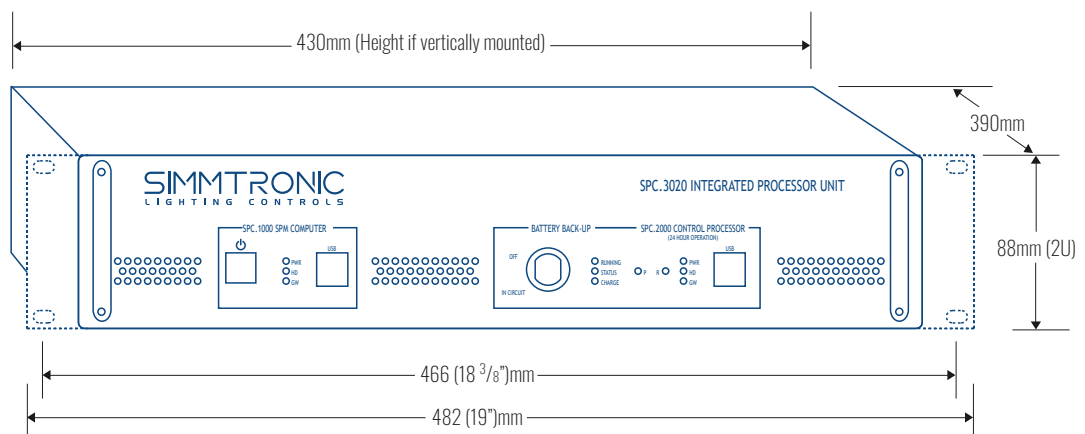

Handles protrude 25mm from front panel.

When standing vertically ensure mounting bracket is used (width of bracket 180mm).

	SPC.1020	SPC.3020
Supports SPM 360 SPECS graphical manager software	✓	✓
Supports Emergency Lighting Automatic Test System Software		✓
Supports SMART building interface via BacNet or MQTT		✓
Built in astronomical time clock software (dawn, dusk)		✓
If free standing supplied with monitor, keyboard or mouse	✓	✓
15 min duration battery UPS for safe shutdown		✓
If rack mounted operation is via client PC or Simmtronic viewer PC	✓	✓

CONTACT US

T | 01992 456865

E | SALES@SIMMTRONIC.COM

E | AFTERSALES@SIMMTRONIC.COM

W | WWW.SIMMTRONIC.COM

HQ | LONDON & SOUTH

WATERSIDE

CHARLTON MEAD LANE

HODDESDON, HERTFORDSHIRE

EN11 0QR

MIDLANDS & NORTH

LOWRY HOUSE

17 MARBLE STREET

MANCHESTER

M2 3AW

SIMMTRONIC