

SPL.

2-20 EXTERNAL PHOTOCELL

SPL.2-20 EXTERNAL PHOTOCELL

A highly versatile, addressable and fully intelligent External Photocell



KEY FEATURES


IP65 External Photocell | Flexible configuration options | Simple LV bus connection from lighting control modules or area controller | LED status indicator

TECHNICAL SPECIFICATION

SUPPLY | Two-wire or E-Bus

WEIGHT | 225g

INGRESS PROTECTION | IP65

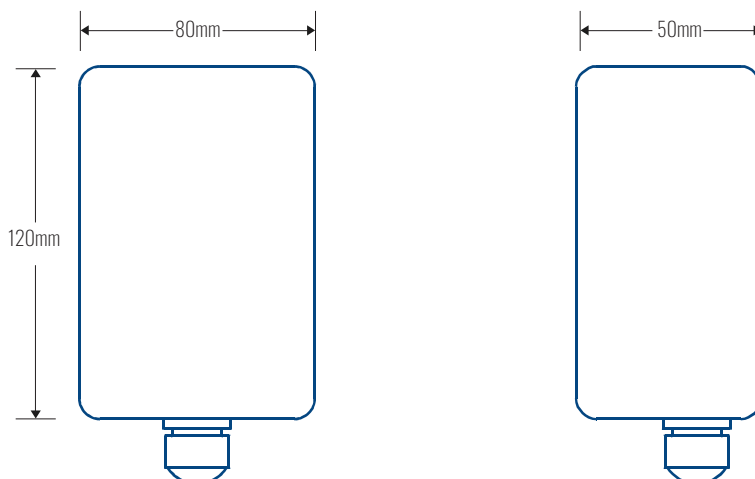

	SPL.2	SPL.20
High performance wide range linear photocell	✓	✓
Accurate, colour corrected light measurement	✓	✓
Flexible configuration via SPECS manager graphical software	✓	✓
Connects to E-Bus pair	✓	✓
Device status feedback	✓	✓
Lux range	Up to 2000 lux	Up to 20,000 lux
Lux resolution	2 lux	20 lux
Suitable for dawn/dusk switching	✓	
Suitable for daylight dimming		✓

CONTACT US
T | 01992 456865
E | SALES@SIMMTRONIC.COM
E | AFTERSALES@SIMMTRONIC.COM
W | WWW.SIMMTRONIC.COM

HQ | LONDON & SOUTH
WATERSIDE
CHARLTON MEAD LANE
HODDESDON, HERTFORDSHIRE
EN11 0QR

MIDLANDS & NORTH
LOWRY HOUSE
17 MARBLE STREET
MANCHESTER
M2 3AW

SIMMTRONIC