


# SPH-R

LIGHTING CONTROL MODULES (27-R & 48-R)



LIGHTING CONTROL  
MODULES

# DALI HARDWIRED HUB WITH RELAYS

The SPH.27-R & SPH.48-R are highly versatile and fully addressable



## KEY FEATURES

Ideal for riser mounting applications | Flexible configuration options | Simple LV bus connections for input devices  
LED status indicator | Mains circuit termination | DALI sub-addressable | Digital dimming


## TECHNICAL SPECIFICATION

SUPPLY | 230VAC, 50Hz

MAX LOAD | 10 amps per circuit

WEIGHT | 1.5kg

INGRESS PROTECTION | IP20

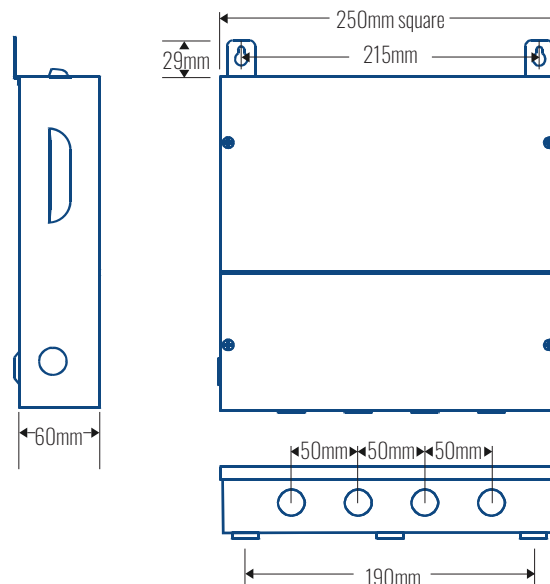

	SPH.27-R	SPH.48-R
DALI outputs	2	2
DALI addressable outputs - Ballast	2x20	2x40
DALI addressable outputs - Emergency inverter	2x10	2x20
DALI addressable outputs - Control devices	2x12	2x12
Supports Automated Emergency Testing	✓	✓
Supports software configurable Manual Emergency Testing	✓	✓
Full DALI addressability	✓	✓
Supports load shedding	✓	✓
Built in fade-processing	✓	✓
Live lamp and gear control status via graphical viewers	✓	✓
Switching relay mains termination inputs and outputs	2	2
Supports DALI bus connected SPECS sensors	✓	✓
Suitable for use with modular wiring systems	✓	✓

---

**CONTACT US**

T | 01992 450126

E | SALES@SIMMTRONIC.COM

E | AFTERSALES@SIMMTRONIC.COM

W | WWW.SIMMTRONIC.COM

**HQ | LONDON & SOUTH**

WATERSIDE

CHARLTON MEAD LANE

HODDESDON, HERTFORDSHIRE

EN11 0QR

**MIDLANDS & NORTH**

BLOC

17 MARBLE STREET

MANCHESTER

M2 3AW

---

**SIMMTRONIC**